


NUMERA HOME SAFETY HUB

PERS 4200X & ACCESSORIES – BLENDING PERSONAL AND HOME SAFETY

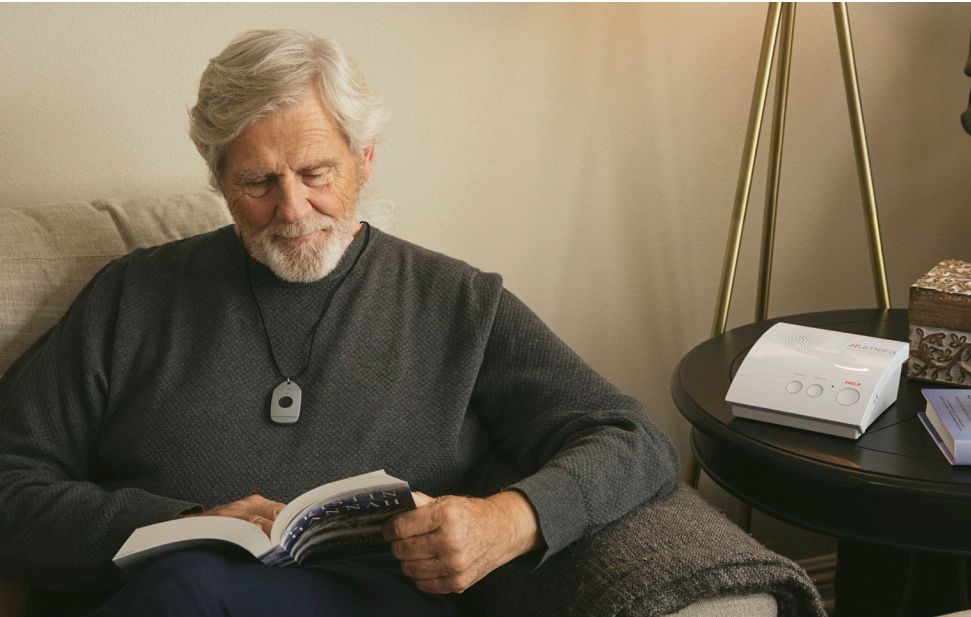

Key Features

- **Connectivity Hub:** connects wirelessly with 2GIG® home sensors, and personal emergency wearables
- **Connected Care:** delivers user and environmental data to a user's family and care team
- **Peace of Mind:** automatic fall detection to provide 24x7 support even when nobody is around
- **Versatile:** the PERS-4200X console can be used standalone or with a 4G LTE cellular module

COMPLETE AGING IN PLACE SOLUTION

The Numera® PERS-4200X console brings forth a new and scalable next generation all-in-one Personal Emergency Reporting System. Numera from Nortek Security & Control, leveraging its Linear® PERS legacy and integrating with 2GIG® home control sensors, has developed a smart home personal security and safety ecosystem with options to suit any customer who is looking for the best tools for independent living.

With complementary lightweight wearables and an upgradeable ecosystem, the Numera Home Safety Hub suite of products ensures a safer and more protected home. With the included Personal Help Button Pendant, assistance is just a discreet button push away, and with automatic alerts of a potential fire or a fall in the home via 2GIG home sensors, help is summoned even when the user cannot react.

The hub combines information from sensing devices like CO and smoke detectors, motion and door-window sensors. Includes alerts from wireless personal emergency sensors and wearables in a single PERS console for seniors or others needing support while living alone.



Numera
PERS 4200X
Console



Optional 4G LTE
Cellular Module

#1 US Provider of Personal Emergency Response Solutions to Direct Dealers

Please visit numera.com, or contact your local Sales Manager.

NUMERA HOME SAFETY HUB SENSORS & KEY FEATURES

Anywhere in the Home

Completely wireless personal security solution (via land line or cellular module) and personal transmitter range up to 1,000 ft.

Variety of Wearables

Automatic Fall Detection to summon help when you can't.
Personal Help Button to summon help on demand.



Smart Home Safety

Connects with 2GIG, from Nortek Security & Control, home security sensors: fire, CO and activity. Summons help even if you can't press the button.



Great Audio Features

Two-way voice capability provides speakerphone capability with powerful speaker for home coverage.

Optional Capabilities

4G LTE Cellular module enables wireless connection.

Personal Safety Wearables (345 MHz)



2GIG-F1-345 Fall Detector Pendant

A configurable personal safety wearable with advanced fall detection leveraging Numera® Libris® fall algorithms



2GIG-PHB1-345 Convertible Personal Help Button

Convertible model with option to be worn as a lanyard pendant or on the wrist

Accessory

- 4G LTE Module enables wireless connection
- PERS-LTEA-4200X (USA)
- PERS-LTET-4200X (Canada)

Home Sensors (2GIG 345MHz sensors)

- 2GIG-SMKT8-345 Smoke, Heat and Freeze Detector
- 2GIG-C08-345 Carbon Monoxide Detector
- Activity sensors including 2GIG-PIR1-345 and 2GIG-DW10-345



Smoke, Heat and Freeze Detector
2GIG-SMKT8-345



Carbon Monoxide Detector
2GIG-C08-345



Motion Detector
2GIG-PIR1-345

PERS 4200X SYSTEM SPECIFICATIONS

| | |
|----------------------|---|
| Voice Support | 2-way voice capability with mobile terminated voice cap |
| Powerful Speaker | Extended range coverage, family can talk to you even if you can't get to a phone or pendant |
| Transmitter Range | Up to 1,000 ft, no antenna required |
| RF Frequency | 345 MHz |
| Receiver type | Dual diversity |
| Upgradable Firmware | Yes |
| Local Programming | USB Port for upgradeable firmware |
| Communicator Formats | Ademco CID, 4*2 Report Format, Report Format |

PERS-4200X CONSOLE

| | |
|-------------------------|--|
| Illuminated Help Button | Easy to see at night |
| Connections | Input telephone jack, USB port, proprietary connectors for modules |
| 4G LTE Module | Optional AT&T and Telus module |
| Indicators | Help, Clear, Home, Power Off |
| Back-up Battery | 24 hours |
| Dimensions | 6.4 in L * 6.3 in W * 2.75 in H |
| Regulatory | UL 1635, UL 1637, UL985, ETL |
| Reliability Testing | Full system auto-testing |

Although Nortek Security & Control LLC ("NSC") strives to ensure the accuracy of its content, it cannot guarantee the content is without inaccuracies or errors. It is the user's responsibility to verify content information. The NSC expressly disclaims all liability for such inaccuracies or errors.